


HSD ES 325L 2P 02,00kW H1

H1423H0243
Flüssigkeitsgekühlt *Liquid cooling*

HSD S.p.A www.hsd.it
Via della Meccanica, 16
61100 PESARO (Italy)

ASYNCHRONOUS
3-PHASE MOTOR
DREHSTROM-
ASYNCHRONMOTOR

Ta: 20°C
Ins. Cl. F

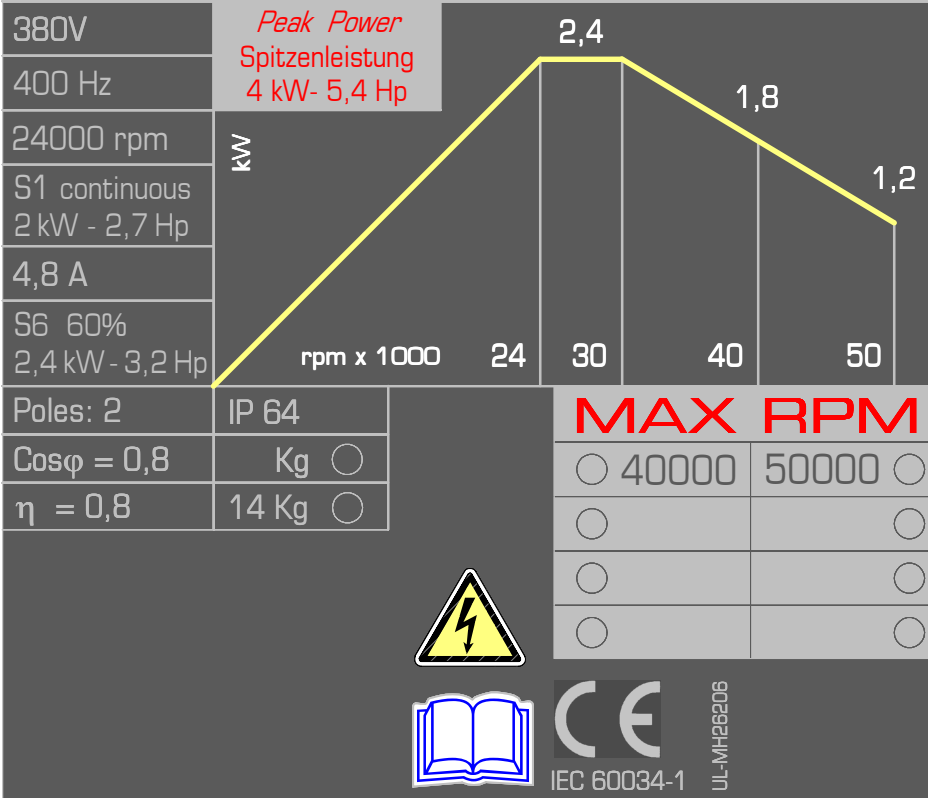

H1423H0243 Rev.00 (H2120H0114 / 076.040.23)

Tensione nominale (*)	Nennspannung (*)	Rated voltage (*)	V	380	380	380	380								
Frequenza nominale	Nennfrequenz	Rated frequency	Hz	400	500	667	833								
Velocità nominale	Nominale Geschwindigkeit	Rated speed	rpm	24000	30000	40000	50000								
Tipo di servizio	Betriebsart	Duty type		S1 cont	S6 60%	S1 cont	S6 60%	S1 cont	S6 60%	S1 cont	S6 60%				
Potenza nominale	Nennleistung	Rated power	kW	2	2,4	2	2,4	1,5	1,8	1	1,2				
Coppia nominale	Nennmoment	Rated torque	Nm	0,80	1,0	0,64	0,76	0,36	0,43	0,19	0,23				
Corrente nominale	Nennstrom	Rated current	A	5	6	5	6	4	5	3	4				
Rendimento nominale η	Nennwirkungsgrad η	Rated efficiency η		0,8											
Fattore di potenza cos φ	Leistungsfaktor cos φ	Power factor cos φ		0,8											
Numero di poli	Polzahl	Number of poles		2											
Classe di isolamento	Isolierklasse	Insulation class		F											
Tipo di raffreddamento	Kühlungstyp	Type of cooling		Raffreddamento a liquido / Flüssigkeit / Liquid cooling											
Peso versione NASO LUNGO	Gewicht Version LANGE NASE	Weight of LONG NOSE variant	kg	14											

[(*) fornita da inverter]

[(*) von Inverter geliefert]

[(*) from inverter]